

# ACCESSORIES, SOFTWARE

Laboratory | Industry | Food Industry





PROFESSIONAL MEASURING


PROFESSIONAL MEASURING


# 2025


# KERN Pictograms


 **Internal adjusting**  
Quick setting up of the balance's accuracy with internal adjusting weight (motordriven)


 **Adjusting program CAL**  
For quick setting up of the balance's accuracy. External adjusting weight required


 **EasyTouch**  
Suitable for the connection, data transmission and control through PC or tablet


 **Memory**  
Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.


 **Alibi memory**  
Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard.


 **KERN Universal Port (KUP)**  
allows the connection of external KUP interface adapters, e.g. RS-232, RS-485, SB, Bluetooth, WIFI, Analogue, Ethernet etc. for the exchange of data and control commands, without installation effort


 **RS-232 Data interface**  
To connect the balance to a printer, PC or network


 **RS-485 Data interface**  
To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible


 **USB Data interface**  
To connect the balance to a printer, PC or other peripherals


 **Bluetooth® Data interface**  
To transfer data from the balance to a printer, PC or other peripherals

 **WIFI Data interface**  
To transfer data from the balance to a printer, PC or other peripherals


 **Control outputs**  
(optocoupler, digital I/O)  
To connect relays, signal lamps, valves, etc.


 **Analogue interface**  
to connect a suitable peripheral device for analogue processing of the measurements


 **Interface for second balance**  
For direct connection of a second balance


 **Network interface**  
For connecting the scale to an Ethernet network


 **KERN Communication Protocol (KCP)**  
It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems


 **GLP/ISO log intern**  
The balance displays weight, date and time, independent of a printer connection


 **GLP/ISO log Printer**  
With weight, date and time. Only with KERN printers.


 **Piece counting**  
Reference quantities selectable. Display can be switched from piece to weight


 **Recipe level A**  
The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out


 **Recipe level B**  
Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display


 **Totalising level A**  
The weights of similar items can be added together and the total can be printed out


 **Percentage determination**  
Determining the deviation in % from the target value (100 %)


 **Weighing units**  
Can be switched to e.g. nonmetric units. See balance model. Please refer to KERN's website for more details

 **Weighing with tolerance range (Checkweighing)**  
Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model


 **Hold function**  
(Animal weighing program)  
When the weighing conditions are unstable, a stable weight is calculated as an average value


 **Protection against dust and water splashes IPxx**  
The type of protection is shown in the pictogram


 **Suspended weighing**  
Load support with hook on the underside of the balance


 **Battery operation**  
Ready for battery operation. The battery type is specified for each device


 **Rechargeable battery pack**  
Rechargeable set


 **Universal plug-in power supply**  
with universal input and optional input socket adapters for  
A) EU, CH, GB  
B) EU, CH, GB, US  
C) EU, CH, GB, US, AUS


 **Plug-in power supply**  
230V/50Hz in standard version for EU, CH. On request GB, USA or AUS version available


 **Integrated power supply unit**  
Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request


 **Weighing principle Strain gauges**  
Electrical resistor on an elastic deforming body


 **Weighing principle Tuning fork**  
A resonating body is electromagnetically excited, causing it to oscillate


 **Weighing principle Electromagnetic force compensation**  
Coil inside a permanent magnet. For the most accurate weighings


 **Weighing principle Single cell technology**  
Advanced version of the force compensation principle with the highest level of precision

 **Conformity Assessment**  
The time required for conformity assessment is specified in the pictogram

 **DAKkS calibration possible (DKD)**  
The time required for DAKkS calibration is shown in days in the pictogram

 **Factory calibration (ISO)**  
The time required for Factory calibration is shown in days in the pictogram

 **Package shipment**  
The time required for internal shipping preparations is shown in days in the pictogram

 **Pallet shipment**  
The time required for internal shipping preparations is shown in days in the pictogram

KERN Models A-Z

572	31
A	
ABP	50-51
ABP-A	52
ABT-NM	48
ACS / ACJ	46-47
ADB / ADJ	43
ADS / ADT <small>NEW</small>	49
ALS-A / ALJ-A	44-45
B	
BFC	120-121
BIC	117
BID	118-119
BXC <small>NEW</small>	122
C	
CB Q1 / CB Q2 / CB P1	156
CCA	90-91
CCS	92-93
CDS	89
CE Hx	134
CFS	86
CH	165
CIB	83
CJ P / CJ X	159
CKE	87
CO Y1 / CO Y2 / CO Y5	158
CP P4 / CP Y4 / CP P1 / CP Y1 / CP P3	153
CP P2 / CP P7 / CP P8	154
CR Q1 / CR P1 / CR Y1	155
CT Q1 / CT P1 / CT P2	157
CPB	85
CXB/CXB-NM	84
D	
DAB	54
DBS	55
DE	102-103
DLB	56
DS	111
E	
ECB-N / ECE-N	59
EFS	11
EHA	15
EMB	12
EMB-V	13
EMS	14
EOB	100
EOC	104-105
EOE	99
EOS	101
EW-N / EG-N	34
EWJ	30

F	
FCB	61
FCE-N	60
FCF	67
FES / FEJ	40
FFN	72
FGE	66
FKB	62
FOB-LM	68
FOB-S / FOB-NS	69
FOB / FOB-NL	70
FXN / FXN-M	73
H	
HCB	167
HCD	169
HCN	168
HDB-N / HDB-XL	166
HFA	170
HFC	171
HFD	172-173
HFM	174
I	
IFB	110
IFC	108-109
IFS	88
IOC	106-107
IXC	112-113
K	
KBP-V20 IP65	148
KDP	135
KFA-V20	150
KFB-TM	145
KFC-TM	146
KFD-V20	149
KFD-V40 IP68	151
KFN-TM	145
KFP-V20 IP65	148
KFP-V20 IP67	149
KFP-V30	150
KFP-V40 IP68	151
KFS-TM	144
KFU-V20	150
KFU-V30	150
KGP	132
KIB-TM	145
KIP-V20M	149
KXC-TM	147
KXP-V20 IP65	148

N	
NFC <small>NEW</small>	129
NIB	128
NXC <small>NEW</small>	130
P	
PBJ / PBS	37
PCB	26-27
PCD	24
PCJ	28-29
PDS / PDT	38-39
PEJ / PES	36
PFB	25
PLJ / PLS	32
PNS / PNJ	33
PWS	35
R	
RIB	78
RPB	79
S	
SCD-4.0	179
SCD-4.0-PRO	180
SFB / SFB-H	76
SFE	114
SXC	74-75
T	
TGC	9
TGD	9
U	
UFA	123
UFC <small>NEW</small>	126
UIB	124
UID	125
UXC <small>NEW</small>	127
V	
VHB	161
W	
WTB	71
Y	
YKV	133
YRO-01 / -02 / -03	185



KERN Quick-Finder

How I quickly find the product I am looking for

Ahead of each product group allows you to base the search for a certain target group on weighing data you need such as readout, weighing capacity and main features for each model.

And it's as simple as that – find the product you want in 2 steps:

1. Go to the product group index on page 3
2. Pick the appropriate product group and find the product you want using the Quick-Finder



Matrix Needle Printer  
KERN 911-013\*

For printing weighing results on normal paper, which is ideal for long-term archiving.



Matrix Needle Printer  
KERN YKN-01\*

For printing weighing results on normal paper, which is ideal for long-term archiving.



Thermal Printer  
KERN YKC-01

Reliable thermal printer for standard applications.

Technical data

- Needle print
- Speed: 1,8 line/s
- Max. 40 characters per line
- Width of the paper strip: 57 mm wide
- Operation via mains adapter 230 V/50 Hz (standard EU), as standard
- Dimensions housing: W×D×H 100×180×106 mm
- Not suitable for KERN PNS/PNJ, PES/PEJ ranges
- Interface cable not included with delivery

Price printer without interface cable,  
KERN 911-013, € 480,-

Accessories

- Paper rolls (10 pcs.), KERN 911-013-010, € 40,-
- Power Adapter, EU/GB/US/CH/AUS, KERN YKA-42, € 85,-

Technical data

- Needle print
- Speed: 1 line/s
- Max. 16 characters per line
- Width of the paper strip: 44 mm wide
- Operation via mains adapter 230 V/50 Hz (standard EU/GB/US), as standard
- Dimensions housing: W×D×H 158×106×40 mm
- Interface cable not included with delivery

Price printer without interface cable,  
KERN YKN-01, € 310,-

Accessories

- Paper rolls (5 pcs.), KERN YKN-A01, € 38,-

Technical data




- Thermal print
- Speed: 300 mm/s
- Max 58 characters per line
- Supported paper widths: 80 mm (roll)
- Operation via mains adapter 230 V/50 Hz standard EU, as standard
- Interfaces: RS-232
- Dimensions housing W×D×H 125×125×150 mm
- Interface cable not included with delivery

Price printer without interface cable,  
KERN YKC-01, € 310,-

Accessories

- Paper rolls (5 pcs.), KERN YKC-A10, € 50,-

! \* ONLY WHILE STOCKS LAST



Important note for printer orders:

Please state your balance model when ordering, so that the printer can be preconfigured in the factory to suit your balance.

Individual header data:

For printers **KERN 911-013** and **YKN-01** the free software **KERN SHM-01** (see [www.kern-sohn.com](http://www.kern-sohn.com)) can be used to print 4 header lines on the printout (see marking on balance).  
Compatible models: KERN 440, DE, FCB, PCD.



## Dot Matrix Printer KERN YKG-01

High-quality dot matrix printer

Flexible and rapid dot matrix printer for retail, the catering trade and for restaurant kitchens. To print the weights on normal paper, which is ideal for long-term archiving. This model has an interchangeable interface and you will be impressed by how easy it is to replace the paper and ribbon

### Technical data

- Needle print
- Speed: 4,7 line/s
- Max. 42 characters per line
- Supported paper widths:  
58 mm, 70 mm, 76 mm (roll)
- Operation via mains adapter 230 V/50 Hz standard EU, as standard
- Interfaces: RS-232, cash drawer connection, bidirectional parallel
- Interface cable not included with delivery
- Dimensions housing  
W×D×H 160×248×139 mm
- Not suitable for KERN DAB, DBS, DLB, FKT, RFE ranges

Price printer without interface cable,  
KERN YKG-01, **€ 590,-**

### Accessories

- Paper rolls (5 pcs.), KERN YKG-A01, **€ 30,-**

## Thermal Printer KERN YKH-01

High-quality thermal printer –  
fast, robust, user-friendly

Robust, low-maintenance thermal printer for retail, the catering trade and for restaurant kitchens. Extremely compact and long-lasting. Thanks to the waterproof switch cover it is particularly suitable for use under tough, loud environmental conditions



### Technical data

- Thermal print
- Speed: 2 line/s
- Max 64 characters per line
- Supported paper widths:  
58 mm, 80 mm (roll)
- Operation via mains adapter 230 V/50 Hz standard EU, as standard
- Interfaces: RS-232
- Interface cable not included with delivery
- Dimensions housing  
W×D×H 140×199×146 mm
- Not suitable for KERN DAB, DBS, DLB, FKT, RFE ranges

Price printer without interface cable,  
KERN YKH-01, **€ 420,-**

### Accessories

- Paper rolls (5 pcs.), KERN YKH-A01, **€ 30,-**



### Important note for printer orders:

Please state your balance model when ordering, so that the printer can be preconfigured in the factory to suit your balance.

#### Individual header data:

For printers **KERN 911-013** and **YKN-01** the free software **KERN SHM-01** (see [www.kern-sohn.com](http://www.kern-sohn.com)) can be used to print 4 header lines on the printout (see marking on balance).

Compatible models: KERN 440, DE, FCB, PCD.




#### Tip:

#### EasyTouch Individual Print

The print product (e.g. labels) can be individually designed. The size of the print area as well as the placement of the print elements can be customized. The barcode function enables the printing of each element as a barcode or QR code.

For further details, see *EasyTouch*

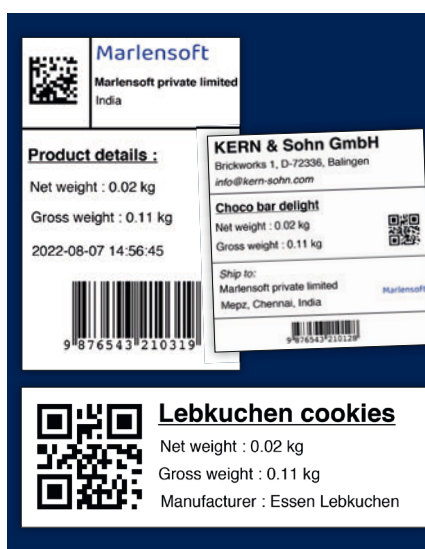

Example printouts with ET Individual Print

## Interface Cable for RS-232


For direct connection to a printer or PC, cable length approx. 1.5 m.  
The interface parameters can be set using the balance keypad.

### Tip:

The interface cable is **free of charge** if you purchase balance, printer or Ethernet-/WiFi-/Bluetooth adapter together.

Printer, ...		PC, YKI-01, -02, -03 KERN	911-013, YKN-01 KERN	YKG-01, YKH-01 KERN	Price cable excl. of VAT ex works €
Balance					
440, 572, 573, ALJ, ALS, ALT-B, DE-D, EMB-V, FKA, FKB, KB, PCB, PCD, PLJ, PLS, KDP	CDS, CKE, FCB, DS, FKB-A, (until year of construction 2022)		572-926		50,-
EOC, IOC, BID, KIB-T, KIB-TM, UID			EOC-A12		50,-
YKV-01, KGP		572-926	-		50,-
ABJ-NM, ABS-N			ACS-A01		115,-
KFB-TM, KFN-TM, NFC (until year of construction 2019)	PFB, SFB, UFB, UFC, NFC		CFS-A01		50,-
CPB, EWJ, KFS-TM, PFB, PFB-M			CFS-A01		
CFS, CCS, KFS-TM, IFS (from year of production 2015)		-	CFS-A01	-	
ABT-NM, PBJ, PBS			770-926		
DBS, DLB			572-926		
DAB			MLB-A05		
ABP, KFS-T			MLB-A05		
ADB, ADJ, ACS, ACJ, PNS/PNJ			MLB-A05		
HFT			KFF-A01		
EG-N, EW-N			474-926		
PES/PEJ					
CCA			CCA-A01		50,- (300,-)
RFE, RPB (not compatible with YKN-01)		-	CFS-A01	CFS-A01	
FES/FEJ, PWS			MLB-A05 (PWS-A02)		

## With products from KERN you are ready to face the challenges of Industry 4.0

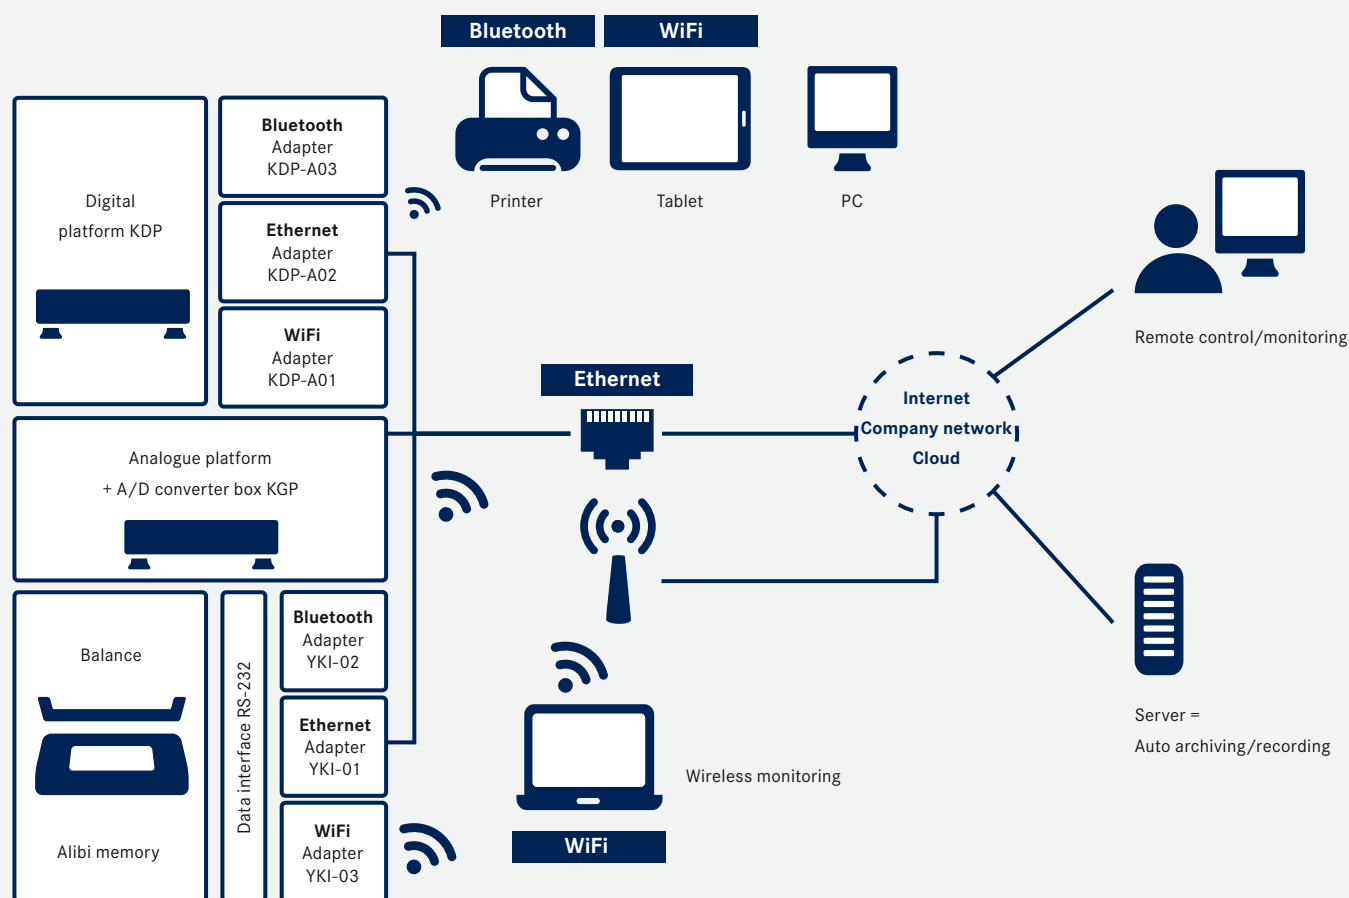

We will help to combine industrial production with the latest information and communication technology, with the aim of improving quality, reducing costs and using time and resources more efficiently so that you are able to react to future requirements in a more flexible manner. You will benefit from our uniform data protocol combined with our BalanceConnection 4.0 data software, for details please see page 179/180.




## KERN Software BalanceConnection SCD-4.0


Flexible recording or transfer of measurements, particularly to Microsoft® Excel



Programme start and quick configuration of the RS232/USB interface

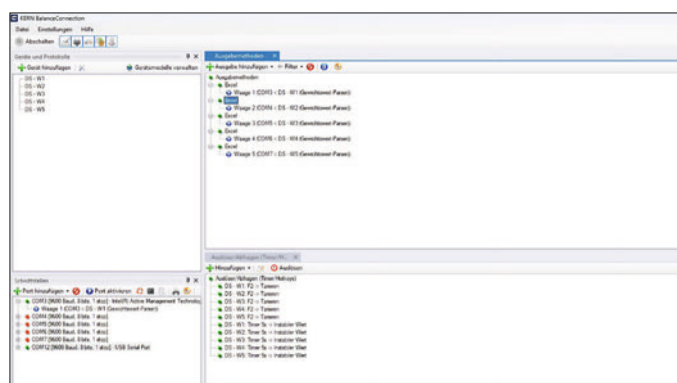

Full overview of devices, outputs, queries, interfaces, etc. directly in the output window

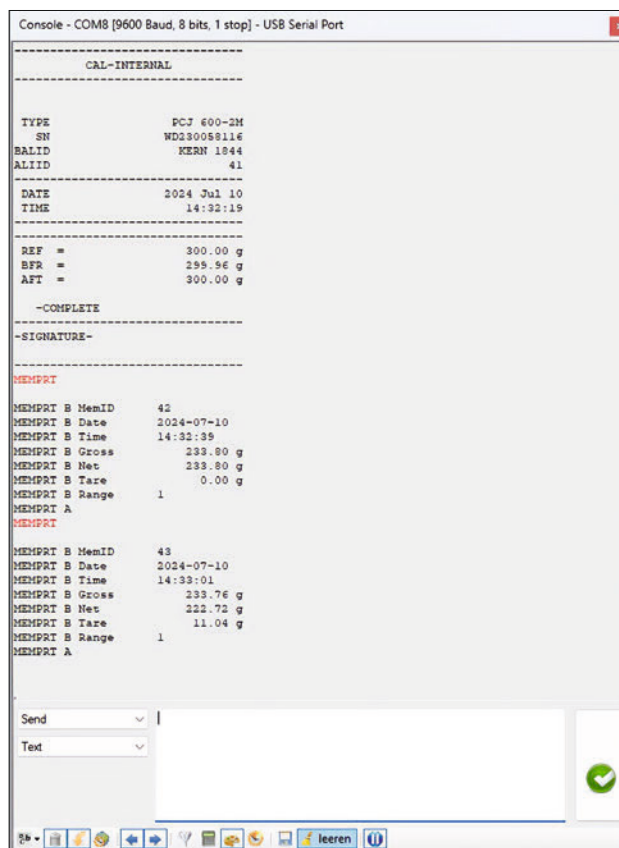

Query measurement results, calibration protocol or alibi memory data via remote control commands. Can be saved as a text file.

### Do you have any questions?

The team from our Industry 4.0 centre of expertise will be happy to help: e-mail: [etsales@kern-sohn.com](mailto:etsales@kern-sohn.com)

**Tip:** Or download a free demo version of the BalanceConnection software: <http://balanceconnection.kern-sohn.com/demo>

### Features

- For operating systems Windows 10, 11, .NET Framework 4.8.1 required
- Supports balances measuring devices with RS 232, RS 485, Bluetooth, LAN or WiFi network (TCP/UDP/IP)
- Highly flexible formatting of the output (any order, formatting and rounding), particularly recording of date and time for every value transferred, if required
- Any number of devices/interfaces can be connected, as well as simultaneous and synchronised recording of several balances
- Key-activated or time-controlled interrogation of measurements or trigger of device functions, also for continuous recording
- The interface protocols for KERN balances are already predefined (standard configuration)

- Compatible interface cable included when you order a KERN balance at the same time
- Many different transfer and recording options:
  - Microsoft® Excel/Access/Word in the foreground or background
  - Other Windows applications (through key simulation), e.g. shipping software or ERP system (SAP, Sage, etc.)
  - File recording (e.g. as text or CSV file)
  - Print out on text or label printer
  - Screen output such as large display, line chart (drying curve for moisture analyser), histogram, etc.

### Benefits

- Typing errors during e.g. manual transfer are avoided
- Automatic recording, e.g. for long-term tests
- Supports GLP-compliant processes
- Can be used across different branches and applications
- Also available immediately as a download license
- Scope of supplies:
  - Download link for 1 license, KERN SCD-4.0-DL, € 210,-

# KERN Software BalanceConnection SCD-4.0

Professional and highly flexible recording or transmission of measured values, in particular also to Microsoft® Excel or Access


	Soll	Ist	Datum / Uhrzeit	Differenz	Abweichung	Gesamt
PBJ 4200-2M	200 g	200,47 g	2023-05-07 12:15	0,47 g	0,23%	200,47 g
(große Mengen)	400 g	411,21 g	2023-05-07 12:15	11,21 g	2,80%	611,68 g
	1000 g	1.002,39 g	2023-05-07 12:15	2,39 g	0,24%	1.614,07 g
ABI 80-4M	5,000 g	4,9993 g	2023-05-07 12:16	-0,0007 g	-0,01%	1.619,0693 g
(kleine Mengen)	1,000 g	0,9984 g	2023-05-07 12:16	-0,0016 g	-0,16%	1.620,0677 g
	0,001 g	0,0011 g	2023-05-07 12:17	0,0001 g	10,00%	1.620,0688 g

Easy transfer and editing of measuring results e.g. in Microsoft® Excel

## Do you have any questions?

The team from our Industry 4.0 centre of expertise will be happy to help:  
e-mail: [etsales@kern-sohn.com](mailto:etsales@kern-sohn.com)

**Tip:** Or download a free demo version of the BalanceConnection software: <http://balanceconnection.kern-sohn.com/demo>

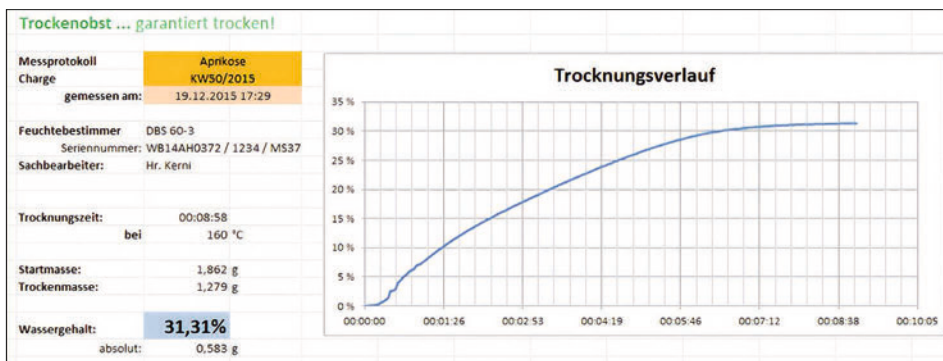

Measurement protocol with moisture analysis progression diagram

## Features

- For operating systems Windows 10, 11, .NET Framework 4.8.1 required
- Supports balances measuring devices with RS 232, RS 485, Bluetooth, LAN or WiFi network (TCP/UDP/IP)
- Highly flexible formatting of the output (any order, formatting and rounding), particularly recording of date and time for every value transferred, if required
- Any number of devices/interfaces can be connected, as well as simultaneous and synchronised recording of several balances
- Key-activated or time-controlled interrogation of measurements or trigger of device functions, also for continuous recording
- The interface protocols for KERN balances are already predefined (standard configuration)
- Compatible interface cable included when you order a KERN balance at the same time
- Many different transfer and recording options:
  - Microsoft® Excel/Access/Word in the foreground or background
  - Other Windows applications (through key simulation), e.g. shipping software or ERP system (SAP, Sage, etc.)
  - File recording (e.g. as text or CSV file)
  - Print out on text or label printer
  - Screen output such as large display, line chart (drying curve for moisture analyser), histogram, etc.


## Additional features of the PRO version

- ODBC/SQL databases such as SQL Server or MySQL
- Transfer to HTTP Webservices/Web forms
- Histogram
- Enables the connection of medical balances to practice EDP systems using the device data transfer protocol (GDT) and also the HL7 protocol
- Implementation of programs/scripts using freely-definable command lines
- Command sequences
- Defining the conditions for specific events and the reaction to these events
- Filter for stability recognition (configurable value storage)
- Central configuration repository, e.g. on the network
- On-screen displays with configurable user interface for flexible balance operation

## Benefits

- Ideal software where weighing data which has been collected needs to be transferred to a Windows PC
- Particularly suitable for professional integration of weighing systems into existing networks where there is a high demand for automated data transfer and further processing, for integration of databases
- Automatic recording, e.g. for long-term tests
- Supports GLP-compliant processes
- Can be used across different branches and applications
- Any number of balances can be used on one PC/workstation per licence
- Also available immediately as a download licence
- Scope of supplies: Download link for 1 License, KERN SCD-4.0-PRO-DL, € 380,-



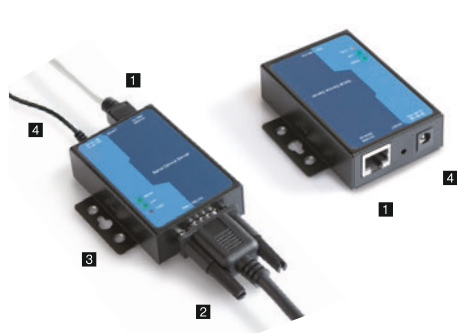


### RS-232/Ethernet Adapter KERN YKI-01

#### Technical data

Adapter to connect balances, force measuring devices etc. with an RS-232 interface **2** to an IP-based Ethernet network **1**. The adapter allows direct integration of measuring devices into most company networks, with automatic configuration using DHCP or statistical IP allocation. You can access the current measuring data at any time from within the whole network, without having to use additional cables. The adapter supports a wide range of configurational options using the enclosed administration software or by the web interface. The driver delivered with the goods allows you to access the measuring device with existing, non-network-compatible applications using a virtual COM port. Compatible with KERN BalanceConnection software. DIN track mount **3** or free-standing. Scope of delivery: RS-232 Ethernet adapter with 1x Port RS-232 **1**, mains adapter **4**, CD (driver, software, operating instructions), adhesive feet

KERN YKI-01, € 380,-

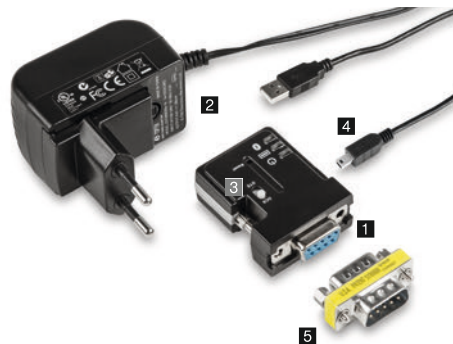

### RS-232/Bluetooth Adapter KERN YKI-02


#### Technical data

Adapter for the wireless connection of balances, force measuring devices etc. with an RS-232 interface to Bluetooth devices, such as Bluetooth printers, tablets, laptops, Smartphones etc. In this way, where there is a physical separation or a large distance between the devices, the weighing data from one or several balances can be easily sent without cable and printed on a Bluetooth printer or transferred to a Bluetooth device (you would need the relevant software on the Bluetooth device, not included with the delivery). The compact adapter with its attractive design can usually be connected directly to the balance **1**, e.g. an additional interface cable would not be necessary. Bluetooth adapter will be powered by the balance (if compatible) or with the mains adapter which is supplied as standard **2**. Range up to 100 m outside, depending on obstacles, such as, walls, the sensitivity and type of antenna of the receiver. Intersections of sending and receiving lines using the DCE/DTE switch **3**. Compatible with KERN Software BalanceConnection.


Scope of delivery: RS-232/Bluetooth adapter, mains adapter (EU/GB/US/AUS/CH) **2**, USB-A to Mini-USB-B cable **4**, gender changer **5**, driver CD,

KERN YKI-02, € 380,-

#### STANDARD



#### STANDARD



**Note:** To connect to your network, you will need information from your network administrator. We recommend discussing connecting your device into your network with the administrator before you place your order.

**Note:** If you order a KERN balance at the same time, then the interface cable is **free of charge** (please specify balance model).




### Large Display KERN YKD-A02

#### Technical data

With superior display size, digit height 3" (76 mm). Luminescent, red LED display for easy reading of weight, even from a distance or under poor lighting conditions. 6 segments, mains connection as standard (230 V, EU/GB), connection using RS-232 data interface, dimensions W×D×H 541×55×180 mm.

Suitable for serie UFA

KERN YKD-A02, **€ 310,-**



### Signal Lamp KERN CFS-A03

#### Technical data

Signal lamp for visual support of weighing with tolerance range. Three-colour LED, red, green, yellow. Power supply via balance using RS-232. Total dimensions W×D×H 100×180×300 mm

Suitable for series BID, CDS, CKE, CPB-N, DS, FCB, FKB, IFS, IFC, IOC, IXC, KFB-TM, KFN-TM, KIB-TM, NFC, SFB, SXC, UFA, UFC

KERN CFS-A03, **€ 310,-**



### Power Supply Adapter Set KERN YKA-02

#### Technical data

From standard EU to GB/US/AUS/CH etc. Four pieces. Ideal for devices with Class II protection (not earthed). Ideal for Euro moulded plug,

KERN YKA-02, **€ 35,-**



### 2nd RS-232 Data Interface KERN CFS-A04

#### Technical data

Separate Y cable, e.g. for simultaneous connection of a printer and a signal lamp.

Suitable for series CFS, CPB-N, KFB-TM, UFA, SFB,

KERN CFS-A04, **€ 38,-**



### RS-232/USB Adapter KERN AFH 122

#### Technical data

To connect peripheral devices with USB connection, fits on all balances and measuring instruments with RS-232 port.

Please order the appropriate RS-232 interface cable for your balance at the same time, see table on Page 178

Scope of delivery: Converter cable, CD with driver,

KERN AFH 12, **€ 95,-**



### Stand (Tripodal) KERN YKP-02

#### Technical data

stable and robust, to elevate display device, stainless steel, height-adjustable, large three-legged adjustable foot, height of stand approx. 750–1000 mm, Factory Option.

Suitable for series BFB, BXS, BFS, BFA, IFS, IFB, KFE-TM, KXG-TM, KXS-TM, KEN-TM, NFC, SFE, UFA, UFB,

KERN YKP-02, **€ 220,-**



### Protective Dust Cover KERN ABS-A08

#### Technical data

For protection from dust and light (Fig. similar).

Suitable for all KERN analytical balances and precision balances with glass draught shield,

KERN ABS-A08, **€ 32,-**



### Tare Pan KERN RFS-A02

#### Technical data

Made of stainless steel, which makes cleaning easy and hygienic. Ideal for weighing loose screws, small parts as well as fruit, vegetables, cheese, etc.

- W×D×H 400x300x45 mm
- Net weight approx. 554 g

KERN RFS-A02, **€ 75,-**



### Tare Pan with Pan Beam KERN CH-A01N

#### Technical data

Made of stainless steel. Ideal for weighing loose small parts as well as fruit, vegetables etc. Max. load 30 kg. Removable tare pan which makes cleaning easy and hygienic.

Suitable for models KERN CH 15K20, HCB 20K10, HDB-N, HDB-XL

- Dimensions: tare pan, Ø/H 160×40 mm (dim. outside), 240×40 mm (dim. inside)
- Pan beam: W×D×H 290×240×300 mm 290×240×340 mm (incl. tare pan)
- Total net weight approx. 500 g

KERN CH-A01N, **€ 88,-**



### Universal Density Set KERN YDB-03

#### Technical data

Universal density set for precise and convenient density determination of liquids and solids  $\leq/\geq 1$ . Suitable for all current KERN analytical balances. Scope of delivery: Beaker ( $\varnothing \times H$  84×113 mm), thermometer, sample holder, adapter, equalising weights, volume plummet (stainless steel, 20 g), universal submersible basket for solid bodies which float and sink. The wire of the submersible basket has a diameter of 0.5 mm and therefore complies with the requirements of DIN EN ISO 1183-1 (test methods for the determination of density of non-foamed plastics), KERN YDB-03, **€ 380,-**

Optional:

Density determination of the volume plummet, DAkkS calibration certificate with all data relating to the density and volume, KERN 962-335V, **€ 175,-**



### ESD Earthing Kit KERN YGR-01

#### Technical data

ESD drain to protect against electrostatic discharge e.g. for electrostatically-charged weighing objects or people who work with the scale, KERN YGR-01, **€ 60,-**



### Ioniser to neutralise Electrostatic Charge KERN YBI-01A

#### Technical data

Goods to be weighed which are non-conductive, such as plastic, china, glass, etc often carry electrostatic charge. The electromagnetic field which then occurs between the goods to be weighed and the balance can cause the weighing result to be distorted by up to a gramme. Therefore, when weighing in milligrammes or even smaller increments, we recommend neutralising the electrostatic charge with the KERN AC-Korona discharge ioniser. With feet supplied with the ioniser, it can be positioned conveniently next to the balance or you can manually direct it from all sides onto a particular item to be weighed.

- Discharge of ozone 0,05 ppm/h
- Total dimensions W×D×H  
115×100×60 mm (Adjustable foot retracted),  
115×110×80 mm (Adjustable foot folded out)
- Net weight approx. 0,31 kg
- Mains connection 100–240 V, 50/60 Hz,  
AC power supply, DC 12 V, 500 mA, output,

KERN YBI-01A, € 950,-



### Weighing Table KERN YPS-03

#### Technical data

The KERN YPS-03 weighing table has been constructed to absorb vibrations and oscillations, which would otherwise distort the weighing result.

The YPS-03 weighing table consists of:

- a heavy, polished granite slab (24 kg) and is positioned on absorbing rubber components and is used as a surface on which to stand the analytical balance
- a work table, the work surface of which surrounds the slab and offers many storage options. The sturdy powder-coated steel frame has four height-adjustable feet, which can be used to accurately level the weighing table if the floor is at all uneven
- You can work in an ergonomic way at the weighing table whether you are in a standing or seated position. The inlet on the front of the table offers enough space for you to sit down and operate the scale without touching the weighing table.
- All surfaces are hygienic and easy to clean
- Suitable for all KERN analytical balances with total dimensions ≤ W×D 300×400 mm
- Total dimensions W×D×H  
785×600×800 mm (Height adjustable)
- Dimensions granite slab, W×D×H  
300×400×80 mm
- Net weight approx. 46 kg

Ready for shipping in 2 working days. Dispatch complete on pallet, simple self-assembly. Please ask for dimensions, gross weight, shipping costs,

KERN YPS-03, € 990,-

STANDARD



### Anti-vibration Granite Plates KERN YPS-04, YPS-05, YPS-06

#### Technical data

- The KERN YPS-04, -05, -06 anti-vibration granite plates are designed to dampen shocks and vibrations that would otherwise distort the weighing results of high precision Laboratory Scales and analytical balances. Also ideal for vibration-free microscope set-up
- The anti-vibration granite plate is made of polished granite, which is supported on absorbent damping elements
- The anti-vibration granite plate can be used ergonomically while standing or sitting comfortably
- Compact size, practical for small spaces
- All surfaces are hygienic and easy to clean
- Suitable for all KERN analytical balances, precision balances and microscopes with the corresponding dimensions
- Overall dimensions, W×D×H  
YPS-04: 400×450×60 mm  
YPS-05: 565×450×60 mm  
YPS-06: individual dimensions, according to your requirements
- Net weight approx.  
YPS-04: 30 kg  
YPS-05: 35 kg  
YPS-06: on request

Ready for shipping in 2 working days. Dispatch complete on pallet. Please ask for dimensions, gross weight, shipping costs,

KERN YPS-04, € 760,-  
KERN YPS-05, € 980,-  
KERN YPS-06, on request





STANDARD  
  
2 DAYS




## Roller Conveyor

### KERN YRO-01/ YRO-02/ YRO-03

Through the smooth-running KERN roller conveyor attachments, KERN YRO, you can convert your platform scale into a robust measuring system for rapid and flexible weight determination in conveyor applications.

Especially suitable for use in production and dispatch lines, where time means money. The goods or packages can either be weighed as they pass over the balance or, at fixed stations, heavy goods can easily be pushed onto the scale thanks to the roller conveyor and moved onto the connected roller conveyor.

-  Simply connect the roller conveyor attachment to a platform (e.g. KERN IFS, IXC, SXC, KBP, KFP) – done!
- Robust aluminium profile frame. The modular design means that you can easily disassemble it for cleaning or to replace individual components
- Smooth-running, hot-dip galvanised steel rollers with ball bearings
- Conductive rollers
- Suitable for use in dry environments
- Roller distance approx. 30 mm
- Direction of movement is lengthways

- Scope of delivery: 1 roller conveyor attachment (without scale)
- We are happy to adapt the roller conveyor to your scale, adjust the preload or switch-on tolerance, etc. Please ask for your individual offer, your personal KERN contact person will be happy to help you

Model	Total dimensions W×D×H	Suitable for platforms with weighing plate sizes W×D	Total net weight approx.	Price excl. of VAT ex works €
KERN	mm	mm	kg	
YRO-01	405×305×130	400×300	6	830,-
YRO-02	505×405×130	500×400	9	870,-
YRO-03	655×505×130	650×500	12	1200,-





## The oldest Precision Balance Factory in Germany

### KERN & SOHN GmbH

Balances, Test Weights, Microscopes,  
DAkkS Calibration Laboratory

Ziegelei 1  
72336 Balingen  
Germany  
Tel. +49 7433 9933-0  
info@kern-sohn.com  
www.kern-sohn.com

### Discover the multifaceted World of Balances, Microscopes and Measuring Technology from KERN online: [www.kern-sohn.com](http://www.kern-sohn.com)

- Full KERN & SAUTER Product Range
- Convenient 24/7 Ordering
- Selection of more than 5,000 Items across Weighing and Measuring Technology, Optical Instruments as well as Accessories and Services
- Extensive Information and useful Download Options
- Technical Product Data Sheets
- Operating Instructions
- Descriptive Image and Video Material
- Useful KERN Services
- Technical Glossary
- KERN Dealer Portal
- Practical Filter and Search Functions



Follow us on our social media  
channels too



Printed in Germany by KERN & SOHN GmbH  
z-cb-en-kp-20251

